

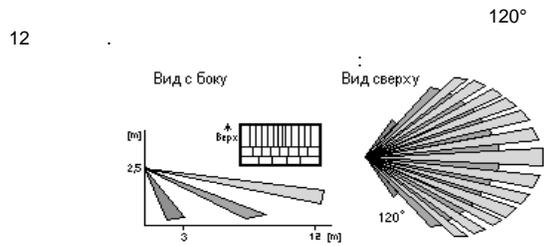
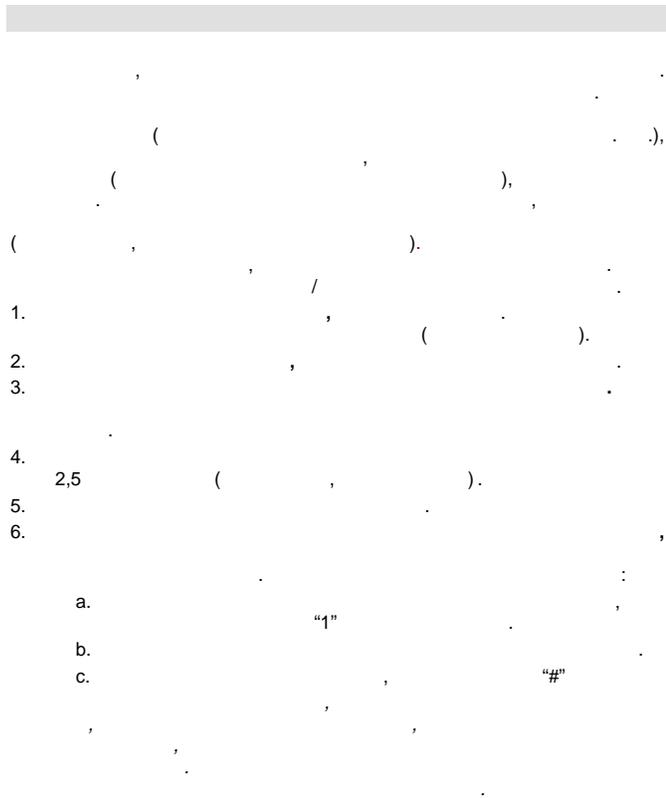


OASIS.



JS-7904	20	
JS-7906	12	120°
JS-7901		

DIP
NORM / HIGH:
 NORM HIGH
DEL / INS: DEL
 INS (INS/DEL)
 Oasis.
 UC-8x AC-8

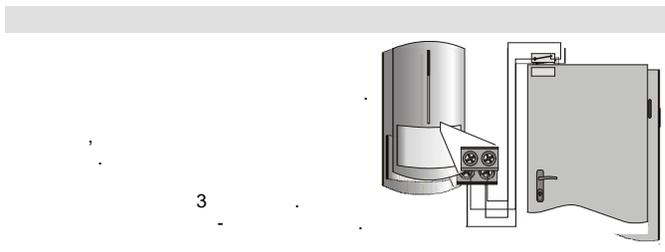

LS(T)14500 (3,6 AA)
 3 (5)
 868 Oasis
 300 -()
 2,0 - 2,5
 / 120° / 12 ()
 EN 50131-1 II,
 -10 ... +40 °C
 110 x 60 x 55
 EN 50131-1, CLC/TS 50131-2-2, EN 50131-5-3: 2
 ETSI EN 300220, EN 50130-4, EN 55022, EN 60950-1
 ERC REC 70-03
CE FCC ID VL6JA80P
 Jablotron Ltd JA-80P Directive 1999/5 15
 FCC. : 1. 2.

15
 5 / 1